



15 K 4 PL 8Ω

15" | 2400 W

Code Z008339

Professional

- SNDW** 4" Sandwich voice coil Kapton former
- DCSP** Double Cross Spider (DCS) with Progressive Waves
- DAR** Cloth surround with Double Asymmetric Rolls Technology (DAR)
- AWpT** Autoclave Waterproof Cone Treatment
- CDR** Neodymium Magnet Circuit with Copper Demodulating Ring
- VMVc** Ventilated Magnet and Voice Coil to reduce Power Compression
- 99.2 dB sensitivity
- Frequency Range 45-2000 Hz

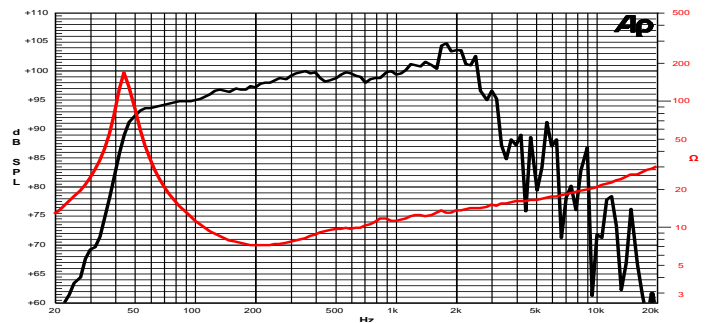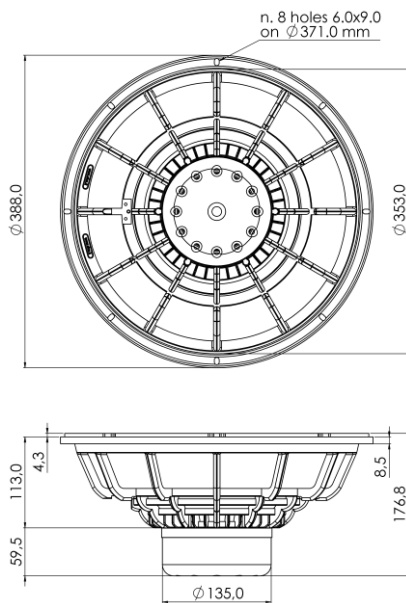

Frequency Response on 90 Lt @ 48 Hz Vented Box @ 1W, 1m
Free Air Impedance

General Specifications

| | |
|---|--------------|
| Nominal Diameter | 388 mm (15") |
| Nominal Impedance | 8 Ω |
| Rated Power AES ⁽¹⁾ | 1200 W |
| Continuous Program Power ⁽²⁾ | 2400 W |
| Sensitivity @ 1W/1m ⁽³⁾ | 99.2 dB |
| Voice Coil Diameter | 100 mm (4") |
| Voice Coil Winding Depth | 21 mm |
| Magnetic Gap Depth | 12 mm |
| Flux Density | 1.23 T |
| Magnet Weight | 536 g |
| Net Weight | 7.0 kg |

Thiele & Small Parameters ⁽⁴⁾

| | | | |
|-----------------|-----------|-----------------|-----------------------|
| R_e | 5.2 Ω | F_s | 45.2 Hz |
| Q_{ms} | 13.80 | Q_{es} | 0.30 |
| Q_{ts} | 0.29 | M_{ms} | 118.0 g |
| C_{ms} | 109 μm/N | B_{xl} | 24.20 Tm |
| V_{as} | 105.0 l | S_d | 855.3 cm ² |
| $X_{max}^{(5)}$ | +/-6.5 mm | $X_{var}^{(6)}$ | +/-10.5 mm |
| η_0 | 3.27 % | L_e (1kHz) | 0.84 mH |

Constructive Characteristics

| | |
|-----------------------------|-------------------------|
| Magnet | Neodymium |
| Basket Material | Aluminium Die-Cast |
| Voice Coil Winding Material | Copper |
| Voice Coil Former Material | Kapton |
| Cone Material | Paper |
| Cone Treatment | Humidity Resistant Pulp |
| Surround Material | Treated Cloth |
| Dust Dome Material | Solid Paper |

Mounting Information

| | |
|------------------------|-----------------------|
| Overall Diameter | 388 mm |
| Baffle Cutout Diameter | 355 mm |
| Mounting Holes | 8 holes 6x9 on 371 mm |
| Total Depth | 176.8 mm |

(1) Rated Power measured with 2-hour test with pink noise signal, 6dB crest factor, loudspeaker in free air, power calculated on rated Zmin. (2) Power on Continuous Program is defined as 3dB greater than the Rated Power. (3) Calculated by Thiele & Small parameters, for SPL average in box refer to frequency response. (4) Thiele & Small parameters measured with laser system after preconditioning test. (5) Measured with respect to a THD of 10%. (6) Value corresponding to a decay of the Force Factor, or Compliance, or both, equal to the 50% of the small signal value. (7) Drawing dimensions: mm.